



Air Cooled Magnetic Bearing Chiller



A Century-Old Brand Famed for Cutting-Edge Technologies

DAIKIN, established in 1924, is a multi-national that offers a portfolio of cooling, air conditioning, refrigeration, and air purification solutions with a commitment to advanced technology development so as to provide energy-efficient products for various customers.

DAIKIN started to develop the magnetic bearing technology in 1993 and launched its first magnetic bearing chiller in 2003. Boasting such successful experience for the magnetic bearing technology over the past 20-odd years, DAIKIN has seen wide applications of its magnetic bearing chillers in sophisticated scenarios, such as data centers, comprehensive hospitals, office building complexes, and industrial processes.

In addition, the utilization of the environment-friendly refrigerants such as R134a or R1234ze, and high efficiency core components, allows DAIKIN's UXEV air cooled magnetic bearing chiller to work in a high efficiency, which benefits the customers in terms of energy saving and sustainability.

Product Advantages

Environmental friendly



The unit can adopt environment-friendly R134a refrigerant, it's without chlorine atoms which does not cause any ozone depletion. And R1234ze is also available, it has zero ODP and a minimal GWP and can serve as an ideal alternative to HFC refrigerant.

Refrigerant	R1234ze	R134a
Type	HFO	HFC
Ozone Depletion Potential (ODP)	0	0
Global Warming Potential (GWP)	<1	1,300

High efficiency and energy saving

Adopting DAIKIN's leading air conditioning design and optimized control technology, along with high-quality components, the chiller demonstrates superior performance in rigorous tests. Ultimately, it achieves new heights in efficiency and energy savings for air-cooled chillers.

The DAIKIN's UXEV is designed with high efficiency to meet different market requirements, especially the new *PB series is optimized designed to better meet super high efficiency requirement such as data centers, with super premium efficiency of COP up to 3.972 at nominal design condition and IPLV up to 7.883 at AHRI condition.

Full Load Efficiency (COP)

Maximum COP=3.972

Integrated Part Load Value (IPLV)



Maximum IPLV=7.883

Notes:

1. Above COP and IPLV is based on the model of UXEV390ST9-*PB, actual performance of different models refers to specifications.
2. COP is based on LWT 7°C and ambient 35°C, IPLV is based on AHRI condition.

Low noise operation

When the compressor is running, the shaft, suspended under magnetic force, does not come into contact with the bearings and therefore has no mechanical friction. In addition to the configuration of the compressor box and low-noise EC condenser fan, the chiller also employs an optimized pipeline design to avoid resonance and noise generation. So the noise of the air cooled magnetic bearing chiller is much lower than that of a common air cooled screw chiller, making it a better choice for noise sensitive customers.

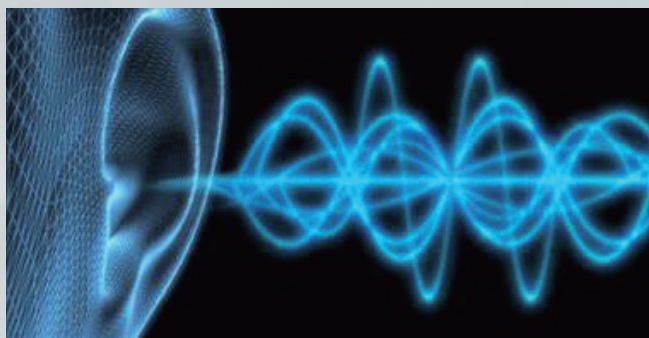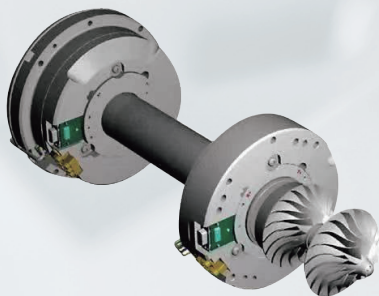

Core Components

► High-speed magnetic bearing compressor



The chiller adopts Turbocor TTS or TGS series magnetic bearing compressor using R134a or R1234ze refrigerant. The use of oil free, magnetic bearing, and inverter designs allows it to operate efficiently with a low noise, while the high-strength aviation aluminum alloy materials ensure its reliability and stability under such high-speed operation.

► EC fan




The chiller uses direct-driven electronically commutated (EC) axial fans, allowing it to steplessly control the fans based on ambient temperature and working load, substantially improving its working efficiency, especially under partial load conditions. The aerodynamic design optimization otherwise helps reduce the running turbulence and noise.

► Economizer



With an optimized design, the air-side heat exchanger performs a primary subcooling and then combines the subcooling circuit of its efficient plate heat exchanger to perform a deep secondary subcooling, aiming to improve the subcooling performance and efficiency.


► V-shaped copper finned tube condenser



The air-side heat exchanger adopts a V-shaped layout to generate uniform airflow. Arranged in a staggered manner and mechanically expanded, the seamless copper tubes use aluminum louvered condensing fins to achieve higher heat exchange efficiency. Gold fin or coatings with higher corrosion-resistant performance are available as options to cater for applications in various regions.

► High efficiency evaporator

The shell and tube flooded or falling film evaporator adopts the most advanced and efficient heat-exchange copper tube bundles. The inner and outer sides of the heat exchange tubes use a special fin design to increase the heat exchange area, and the inner grooved copper tube design improves the turbulent flow of the fluid inside the tube and overall heat exchange efficiency. In addition, the innovative dual safety valve provides a security enhancement for pressure vessels and customers due to such backup design.

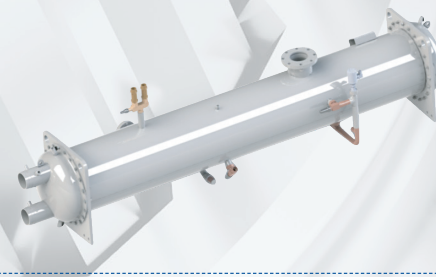

Intelligent Control

■ Smart controller

A user-friendly intelligent control system dynamically monitors and controls the operation status. Such intelligent controller is easy and convenient to operate. Users only need to set the chilled water temperature. Then, the chiller can automatically work as required without any manual intervention.


Remote controllers are also available with a maximum control distance of up to 700 meters.



Standard



Option



Option

■ BAS (optional)

The controller supports BACnet, Modbus, and LonWorks interfaces to connect the unit to the BAS for intelligent management.




Multiple options

To cater for the customer requirements in various scenarios, especially the requirements for a data center, we also provide the following options:

◆ Rapid restart & loading

Chiller can be restarted in 30 seconds and loading to full load in 180 seconds with an UPS for controller.

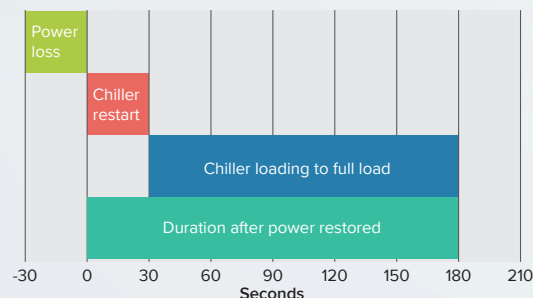

◆ Active power filter

Built-in or external APF controls harmonic and achieve THDi ≤ 5%.



◆ Built-in pump or hydraulic kit

Built-in pump or external pump kit can simplify installation, and a VFD can be chose for variable primary flow (VPF) control.




◆ Other options

- Dry contact for chiller and compressor running status
- ASME certified evaporator
- High ESP (max 100Pa) EC fan
- Blygold for condenser
- Power meter
- Current limit
- Gold fin

Note: For more options requirement please contact Daikin.

Nomenclature

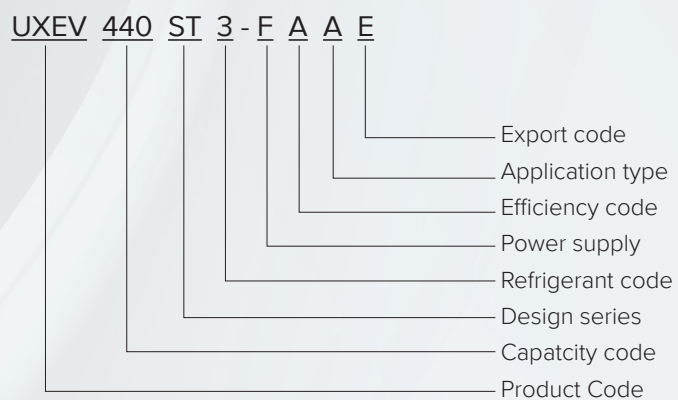

Product code — **UXEV**: Daikin Air Cooled Magnetic Bearing Chiller

Capacity code — **440**: 440RT

Design series — **ST**: Standard

Refrigerant code — **3**: R134a, **9**: R1234ze

Power supply — **F**: 380V/3N~/50Hz,
E: 380V/3N~/50Hz/60Hz,
H: 400V/3N~/50Hz/60Hz,
Q: 460V/3~/60Hz

Efficiency code — **A**: Standard efficiency,
P: Premium efficiency

Application type — **A**: $4^{\circ}\text{C} \leq \text{LWT} < 15^{\circ}\text{C}$, for most of comfort cooling or industrial application,
B: $15^{\circ}\text{C} \leq \text{LWT} \leq 30^{\circ}\text{C}$, for data center and other industrial application

Export code — **E**: for export

Specifications

Model		-	UXEV-ST3-FAA UXEV-ST3-FAB							UXEV-ST3-FAA	
		-	090	130	180	220	260	310	350	390	440
Nominal Cooling Capacity		kW	312.0	462.0	629.0	774.0	920	1091	1232	1382	1549
Total Power Input		kW	93.2	135.6	182.9	228.8	268.7	318.5	361.9	404.3	451.6
COP		-	3.348	3.407	3.439	3.383	3.424	3.425	3.404	3.418	3.430
IPLV		-	5.941	6.013	5.957	6.001	6.037	6.009	6.013	6.049	6.021
Power Supply		-	380V/3N~/50Hz								
Rated Current		A	156	233	312	389	466	545	622	699	778
Maximum Running Current		A	169	245	337	414	490	582	659	735	827
Refrigerant	Type	-	R134a								
	Number of Circuit	-	1	1	2	2	2	3	3	3	4
	Flow Control	-	EXV								
Compressor	Type	-	Magnetic Bearing Oil Free								
	Qty.*Model	-	1*TTS300	1*TTS350	2*TTS300	1*TTS300 1*TTS350	2*TTS350	2*TTS300 1*TTS350	1*TTS300 2*TTS350	3*TTS350	2*TTS300 2*TTS350
	Compressor Power Input	kW	83.6	122.8	163.7	206.4	243.1	286.5	326.7	365.9	406.8
Air-side Heat Exchanger	Type	-	Copper Tube Aluminum Fins								
Fan	Type	-	AC								
	Qty.	-	6	8	12	14	16	20	22	24	28
	Total Air Flow	x104m³/h	12.0	16.0	24.0	28.0	32.0	40.0	44.0	48.0	56.0
	Total Power	kW	9.6	12.8	19.2	22.4	25.6	32.0	35.2	38.4	44.8
Water-side Heat Exchanger	Type	-	High Efficiency Flooded								
	Rated Water Flow	L/s	14.91	22.07	30.05	36.98	43.96	52.12	58.87	66.03	74.01
	WPD	kPa	43.0	76.0	52.0	43.0/76.0	57.0	76.0/52.0	43.0/57.0	76.0/57.0	52.0/57.0
	Minimum Water Flow	L/s	4.2	5.6	8.3	9.7	11.7	13.9	15.8	17.2	20.0
	Maximum Water Flow	L/s	21.1	27.2	41.9	48.3	57.8	69.2	78.9	85.0	99.7
	Pipe Connection	inch	5	5	6	5/5	6	5/6	5/6	5/6	6/6
	Maximum Pressure bearing	MPa	1.0								
Operating range	Ambient temperature	°C	5 ~ 44								
	Leaving water temperature	°C	UXEV-ST3-FAA: 4~15 UXEV-ST3-FAB: 15~30							4~15	
Dimensions	Length	mm	3,325	4,430	6,640	7,775	8,850	11,090	12,195	13,300	15,510
	Width	mm	2,260								
	Height	mm	2,520								
Weight	Shipping weight	kg	3,070	3,660	5,600	6,730	6,650	9,260	9,720	10,310	12,250
	Operating weight	kg	3,100	3,710	5,680	6,810	6,760	9,390	9,860	10,470	12,440
Noise		dB(A)	73.0	73.4	74.0	74.0	75.0	75.6	75.6	75.6	76.0

Notes:

1. Nominal cooling conditions: LWT 7°C, water flow 0.172 [m³/(h·kW)], ambient temperature 35°C.
2. IPLV is based on conditions of AHRI 550/590.
3. All specifications are subjected to change by the manufacturer without prior notice.

Model		-	UXEV-ST9-EAA/HAA/QAA UXEV-ST9-EAB/HAB/QAB					UXEV-ST9-EAA/HAA/QAA		
		-	130	220	260	310	350	390	440	480
Nominal Cooling Capacity		kW	462.0	774.0	920.0	1091	1236	1382	1548	1694
Total Power Input		kW	134.0	213.2	265.1	296.1	347.3	399.1	426.4	478.3
COP		-	3.448	3.630	3.470	3.685	3.559	3.463	3.630	3.542
IPLV		-	7.094	7.228	7.302	7.502	7.483	7.550	7.630	7.520
Power Supply		-	E: 380V/3N~/50Hz/60Hz H: 400V/3N~/50Hz/60Hz Q: 460V/3~/60Hz							
Rated Current	380V/3N~/50Hz/60Hz	A	226	360	448	500	586	674	720	808
	400V/3N~/50Hz/60Hz		215	342	425	475	557	640	684	767
	460V/3~/60Hz		187	297	370	413	484	557	594	667
Maximum Running Current	380V/3N~/50Hz/60Hz	A	271	520	541	781	781	812	1041	1062
	400V/3N~/50Hz/60Hz		271	520	541	781	781	812	1041	1062
	460V/3~/60Hz		240	458	479	688	688	719	917	938
Refrigerant	Type	-	R1234ze							
	Number of Circuit	-	1			2				
	Flow Control	-	EXV							
Compressor	Type	-	Magnetic Bearing Oil Free							
	Qty.xModel	-	1*TGS490	2*TGS490	2*TGS490	3*TGS490	3*TGS490	3*TGS490	4*TGS490	4*TGS490
	Compressor Power Input	kW	121.2	183.2	239.5	267.3	302.3	360.7	366.4	422.7
Air-side Heat Exchanger	Type	-	Copper Tube Aluminum Fins							
Fan	Type	-	EC							
	Qty.	-	8	12	16	18	18	24	24	28
	Total Air Flow	x104m³/h	20.0	33.6	40.0	45.0	50.4	60.0	67.2	73.6
	Total Power	kW	12.8	30.0	25.6	28.8	45.0	38.4	60.0	55.6
Water-side Heat Exchanger	Type	-	High Efficiency Flooded							
	Rated Water Flow	L/s	22.07	36.98	43.96	52.13	59.05	66.03	73.96	80.94
	WPD	kPa	53.0	50.0	50.0	59.0	59.0	58.0	55.0	55.0
	Minimum Water Flow	L/s	11.4	19.4	23.3	27.2	29.7	34.7	38.9	42.8
	Maximum Water Flow	L/s	28.3	48.6	58.3	67.8	74.4	86.7	97.2	106.9
	Pipe Connection	inch	5	6	6	8	8	10	10	10
	Maximum Pressure bearing	MPa	1.0							
Operating range	Ambient temperature	℃	5 ~ 45							
	Leaving water temperature	℃	EAA/HAA/QAA: 4 ~ 15 EAB/HAB/QAB: 15 ~ 30					4 ~ 15		
Dimensions	Length	mm	5,050	7,570	10,090	11,350	11,350	15,160	15,160	17,680
	Width	mm	2,260							
	Height	mm	2,530							
Weight	Shipping weight	kg	3,730	5,730	6,930	8,360	8,750	11,020	11,860	13,060
	Operating weight	kg	3,880	5,930	7,180	8,660	9,150	12,380	13,540	14,790
Noise		dB(A)	79.0	79.6	80.6	81.2	81.2	81.6	81.6	82.0

Notes:

1. Nominal cooling conditions: LWT 7°C, water flow 0.172 [m³/(h·kW)], ambient temperature 35°C.
2. IPLV is based on conditions of AHRI 550/590.
3. All specifications are subjected to change by the manufacturer without prior notice.

Model		-	UXEV-ST3-EPB/HPB/QPB				UXEV-ST9-EPB/HPB/QPB			
		-	390	440	480	520	390	440	480	520
Nominal Cooling Capacity		kW	1,372	1,547	1,688	1,829	1,372	1,547	1,688	1,829
Nominal Cooling Power Input		kW	392.0	428.5	473.6	524.4	345.4	392.9	427.3	462.8
Nominal Cooling COP		-	3.500	3.610	3.564	3.488	3.972	3.937	3.950	3.952
IPLV		-	6.638	6.688	6.663	6.573	7.883	7.780	7.802	7.800
Power Supply		-	E: 380V/3N~/ 50Hz/60Hz H: 400V/3N~/ 50Hz/60Hz Q: 460V/3~/ 60Hz							
Rated Current	380V/3N~/ 50Hz/60Hz	A	662	723	800	885	583	663	721	781
	400V/3N~/ 50Hz/60Hz		629	687	760	841	554	630	685	742
	460V/3~/ 60Hz		547	598	660	731	482	548	596	645
Maximum Running Current	380V/3N~/ 50Hz/60Hz	A	812	1041	1062	1082	812	1041	1062	1082
	400V/3N~/ 50Hz/60Hz		812	1041	1062	1082	812	1041	1062	1082
	460V/3~/ 60Hz		719	917	938	958	719	917	938	958
Refrigerant	Type	-	R134a				R1234ze			
	Number of Circuit	-	2							
	Flow Control	-	EXV							
Compressor	Type	-	Magnetic Bearing Oil Free							
	Qty.*Model	-	3*TTS350	4*TTS350	4*TTS350	4*TTS350	3*TGS490	4*TGS490	4*TGS490	4*TGS490
	Compressor Power Input	kW	353.6	368.5	403.6	473.2	307.0	332.9	357.3	411.6
Air-side Heat Exchanger	Type	-	Copper Tube Aluminum Fins							
Fan	Type	-	EC							
	Qty.	-	24	24	28	32	24	24	28	32
	Total Air Flow	x104m³/h	52.8	62.4	72.8	70.4	52.8	62.4	72.8	70.4
	Total Power	kW	38.4	60.0	70.0	51.2	38.4	60.0	70.0	51.2
Water-side Heat Exchanger	Type	-	High Efficiency Flooded							
	Rated Water Flow	L/s	65.55	73.91	80.65	87.39	65.55	73.91	80.65	87.39
	WPD	kPa	36.6	56.9	47.7	49.3	62.0	42.5	46.1	46.1
	Minimum Water Flow	L/s	26.94	23.33	26.94	26.94	31.39	28.33	28.33	28.33
	Maximum Water Flow	L/s	85.98	97.42	104.72	104.72	86.95	110.14	110.14	110.14
	Pipe Connection	inch	8							
	Maximum Pressure bearing	MPa	1.0							
Operating range	Ambient temperature	℃	5 ~ 45							
	Leaving water temperature	℃	15 ~ 30							
Dimensions	Length	mm	14,440	14,440	16,840	19,240	14,440	14,440	16,840	19,240
	Width	mm	2,260							
	Height	mm	2,540							
Weight	Shipping weight	kg	11,770	12,420	13,690	14,930	11,640	12,300	13,550	14,770
	Operating weight	kg	12,370	13,020	14,380	15,670	12,240	12,900	14,240	15,510
Noise		dB(A)	75.6	76.0	77.3	78.6	76.6	77.0	78.3	79.6

Notes:

1. Nominal cooling conditions: LWT 7°C, water flow 0.172 [m³/(h·kW)], ambient temperature 35°C.
2. IPLV is based on conditions of AHRI 550/590.
3. All specifications are subjected to change by the manufacturer without prior notice.

Warning

- Daikin Industries, Ltd.'s products are manufactured for export to numerous countries throughout the world. Daikin Industries, Ltd. does not have control over which products are exported to and used in a particular country. Prior to purchase, please therefore confirm with your local authorized importer, distributor and/or retailer whether this product conforms to the applicable standards, and is suitable for use, in the region where the product will be used. This statement does not purport to exclude, restrict or modify the application of any local legislation.
- Ask a qualified installer or contractor to install this product. Do not try to install the product yourself. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Use only those parts and accessories supplied or specified by Daikin. Ask a qualified installer or contractor to install those parts and accessories. Use of unauthorized parts and accessories or improper installation of parts and accessories can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Read the User's Manual carefully before using this product. The User's Manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.

If you have any enquiries, please contact your local importer, distributor and/or retailer.

Cautions on product corrosion

1. The units should not be installed in areas where corrosive gases, such as acid gas or alkaline gas, are produced.
2. If the unit is to be installed close to the sea shore, direct exposure to the sea breeze should be avoided. If you need to install the unit close to the sea shore, contact your local distributor.

Dealer**DAIKIN INDUSTRIES, LTD.**

Head Office:

Osaka Umeda Twin Towers South, 1-13-1, Umeda,
Kita-ku, Osaka, 530-0001, Japan

©All rights reserved

Printed with soy ink.