


Air Purifier

AstroPure™ 3400

Product Overview

- Designed to equip with 3 stages of high- performance filters which can effectively remove harmful pollutants
- Equipped with safety limit switch to protect the operators
- Constructed with 2" insulated wall panel for better noise reduction and prevention of condensation
- Design and built for application which demands higher airflow and to meet higher ACH requirement
- Safe and easy to maintain
- Unit equipped with Germicidal protection available

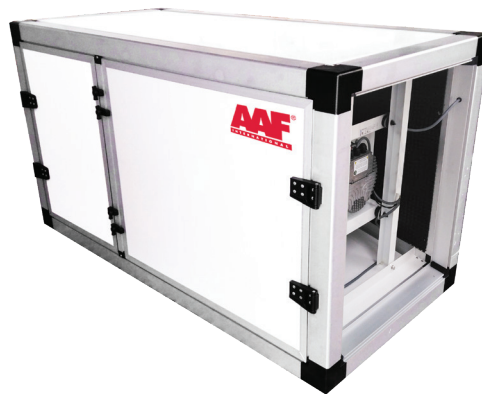

Specification

Airflow	3,400 CMH
Air Outlet	Rectangle Discharge
Controller	Potentiometer
Housing Material	Double Wall Panel Construction
Housing Color	White Powder Coated
Filter Configuration	AmAir® 300E G4 + Varicel® II F7 + MEGAcel® III H14
Power Supply	1Ph/50Hz/230VAC
Average Air Purification Area	181 - 317 m ²
Optional	UVC model
Tested Noise Level	> 57 dBA

*Other optional filters are available. Please contact your sales representative for more information.

Housing Information

Part Number	Model	Actual Housing Size mm (L x W x H)	Voltage / Frequency (V/Hz)	Current (A)	Weight (kg)
M6211-243-10P	AstroPure™ 3400	1577 x 771 x 878	230 ~ 50	0.5	121
M6211-243-12P	AstroPure™ 3400 UV	1577 x 771 x 878	230 ~ 50	0.7	122

Filter Information

Part Number	Model	Actual Size mm (W x H x D)	Filter Class	Purpose
M140-202-863	AmAir® 300E	594 x 594 x 44	G4	Removes coarse particles
M332-410-008	VariCel® II 80 - 85%	594 x 594 x 95	F7	Removes fine particles
M451-205-005	MEGAcel® III eFRM	610 x 610 x 292	H14	Removes finer particles and pathogens
Alternative				
M571-205-005	AstroCel® III	610 x 610 x 292	H14	Removes finer particles and pathogens

*Optional UVC lamp is available upon request that is pre-installed at the factory.

AAF has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice.

www.aafasia.com

